WE'VE GOT

5

1

Heat doubles your cost of labor.
Have you calculated HVAC's negative ROI?

Ē

5

POWER BREEZER

The largest portfolio of cooling solutions, and the industry leader in customer service.



100


0

S POWER BREEZER

> SCHEDULE A DEMO
> CALCULATE YOUR COSTS OF HEAT
> GET THIS CATALOG

6

-9

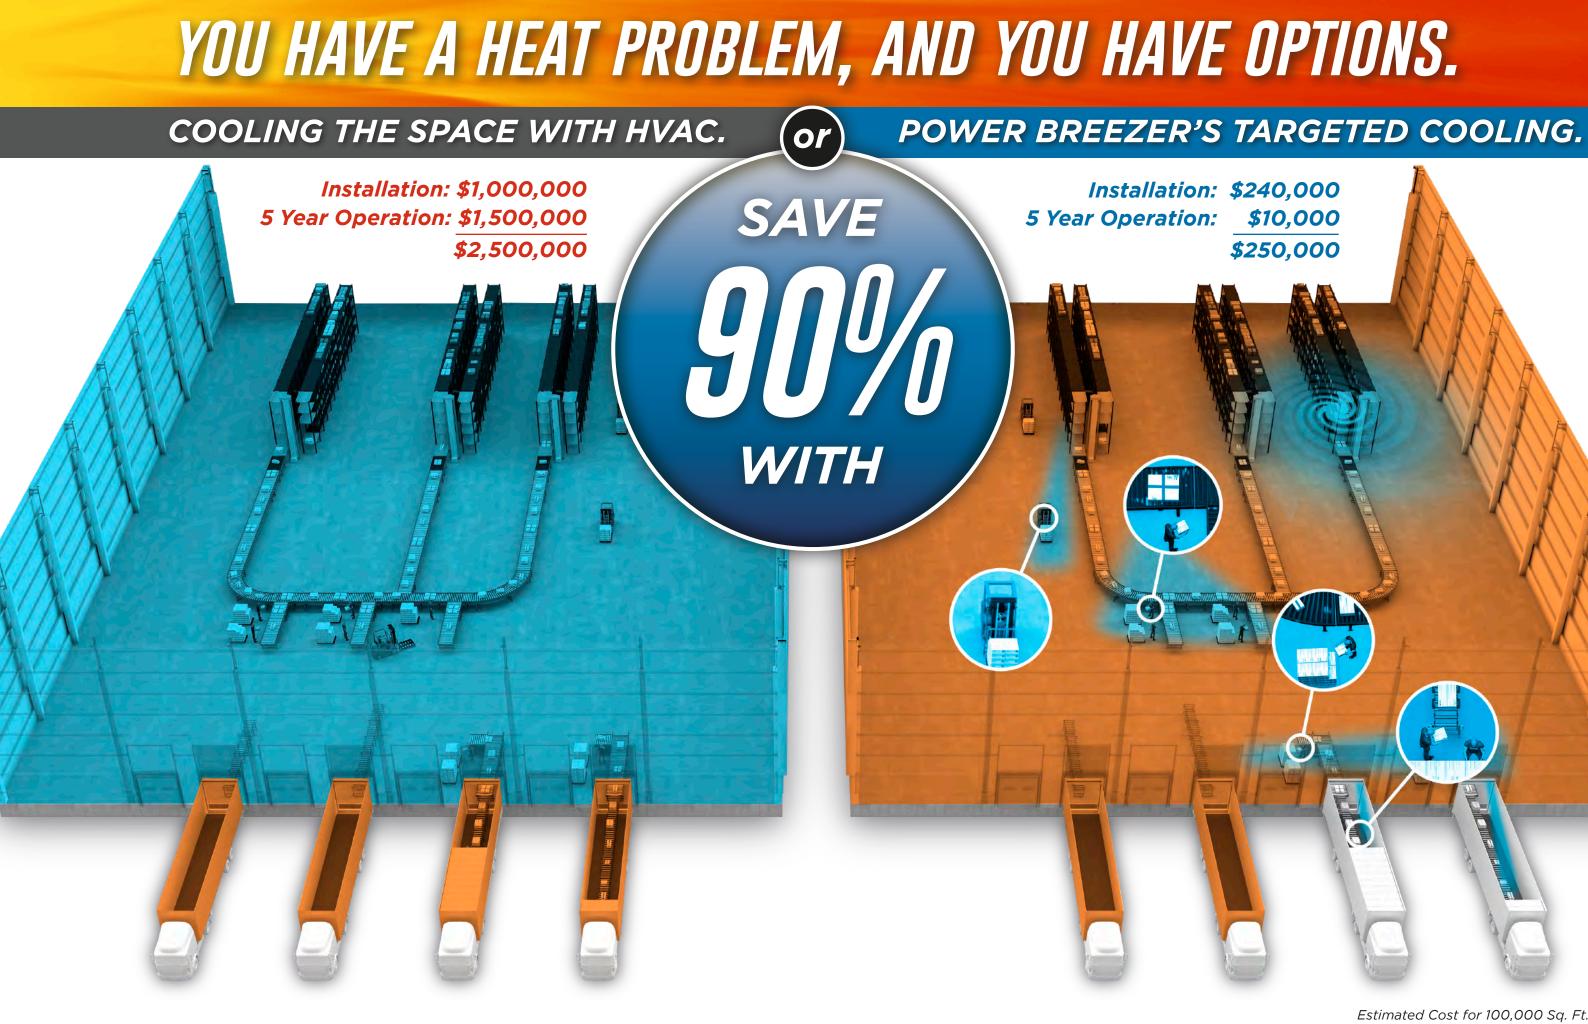


Estimated Cost for 100,000 Sq. Ft.



Our commitment to you is simple but unwavering: We promise to provide a world-class customer experience every time you interact with our team. We guarantee that we will strive to continuously improve our already industry leading customer service, ensuring your Power Breezer units deliver cooling where and when you need it.

Get the information you need, when you need it

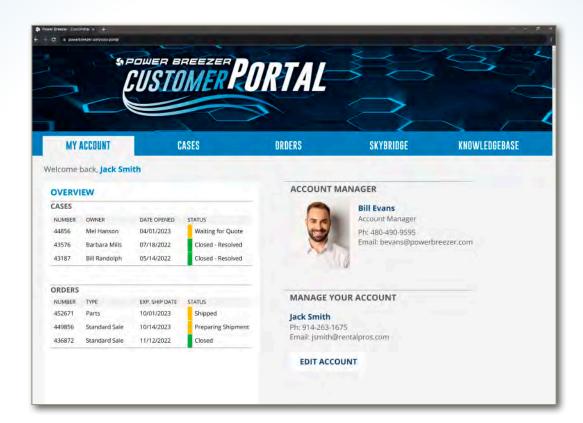

Account snapshot:

- Contact
- Products
- Pricing


Customer service:

- Requests
- History
- Spend

Purchase portal:

- Open orders
- Order history
- New orders

Transparent key Customer Service metrics

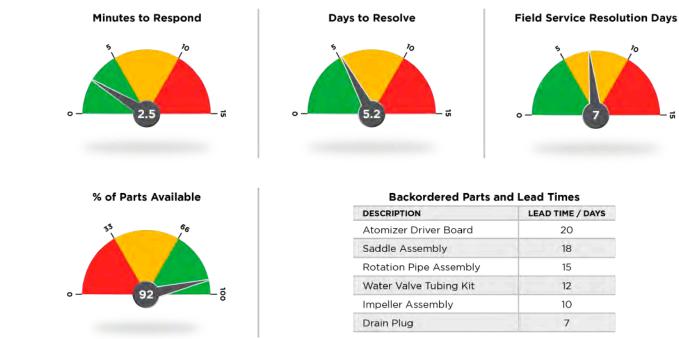

Always ready, always on, customized service programs:

SILVER CARE:

- Free Consumables
- Parts Discounts

GOLD CARE:

- Free Consumables
- Parts Discounts

up to a 10% REBATE*

at the time of purchase with a 3 year Gold or Platinum program.

Contact us for more information

customerservice@powerbreezer.com 844.233.5673

*Subject to service area limitations.

VP, Customer Service

DESCRIPTION	LEAD TIME / DAYS
Atomizer Driver Board	20
Saddle Assembly	18
Rotation Pipe Assembly	15
Water Valve Tubing Kit	12
Impeller Assembly	10
Drain Plug	7

- Cleaning and Diagnostics

PLATINUM CARE:


- Free Parts and Labor
- Cleaning and Diagnostics
- Free Consumables



Power Breezer is committed to a program of constant improvement fueled by interaction with our valued customers that drives change in every aspect of our organization. This results in creating the best possible cooling experience for our customers.

VP, Customer Experience

Does this pattern of customer service look familiar?

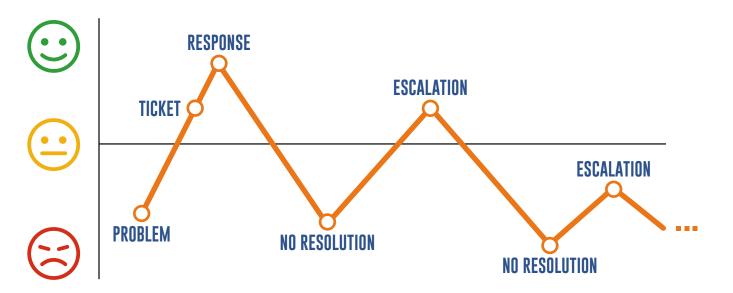

With Power Breezer only you choose who you talk to.



Power Breezer Dedicated Customer Experier You choose how to escalate 100% of new installations sur 100% dissatisfied customers Quarterly customer surveys Customer centric portal Spare parts inventory visibilit $\mathbf{\nabla}$ Dedicated root cause team Transparent performance met Remote monitoring

SPOWER BREEZER



Industry Standard

nce VP	?
	?
veyed	?
interviewed	?
	?
	?
У	?
	?
etrics	?
	?

POWER BREEZER MEDIA

EM-M520S works with E520M Units 3 Pieces: 25.2"H x 11.4"W x 3.9"D

31.9"H x 14.2"W x 5.9"D

UNIVERSAL MEDIA WORKS WITH MOST EVAPORATIVE COOLERS



JTS-M260S 5 Pieces: 48"H x 12"W x 6"D

ORDER YOURS TODAY!


- www.powerbreezer.com/product-category/parts/
- customerservice@powerbreezer.com
- ▶ 844.233.5673

WORKS WITH OUR EVAPORATIVE COOLERS



ESL-M1220S works with E122SL Units 3 Pieces 44.9"H x 18.9"W x 5.9"D



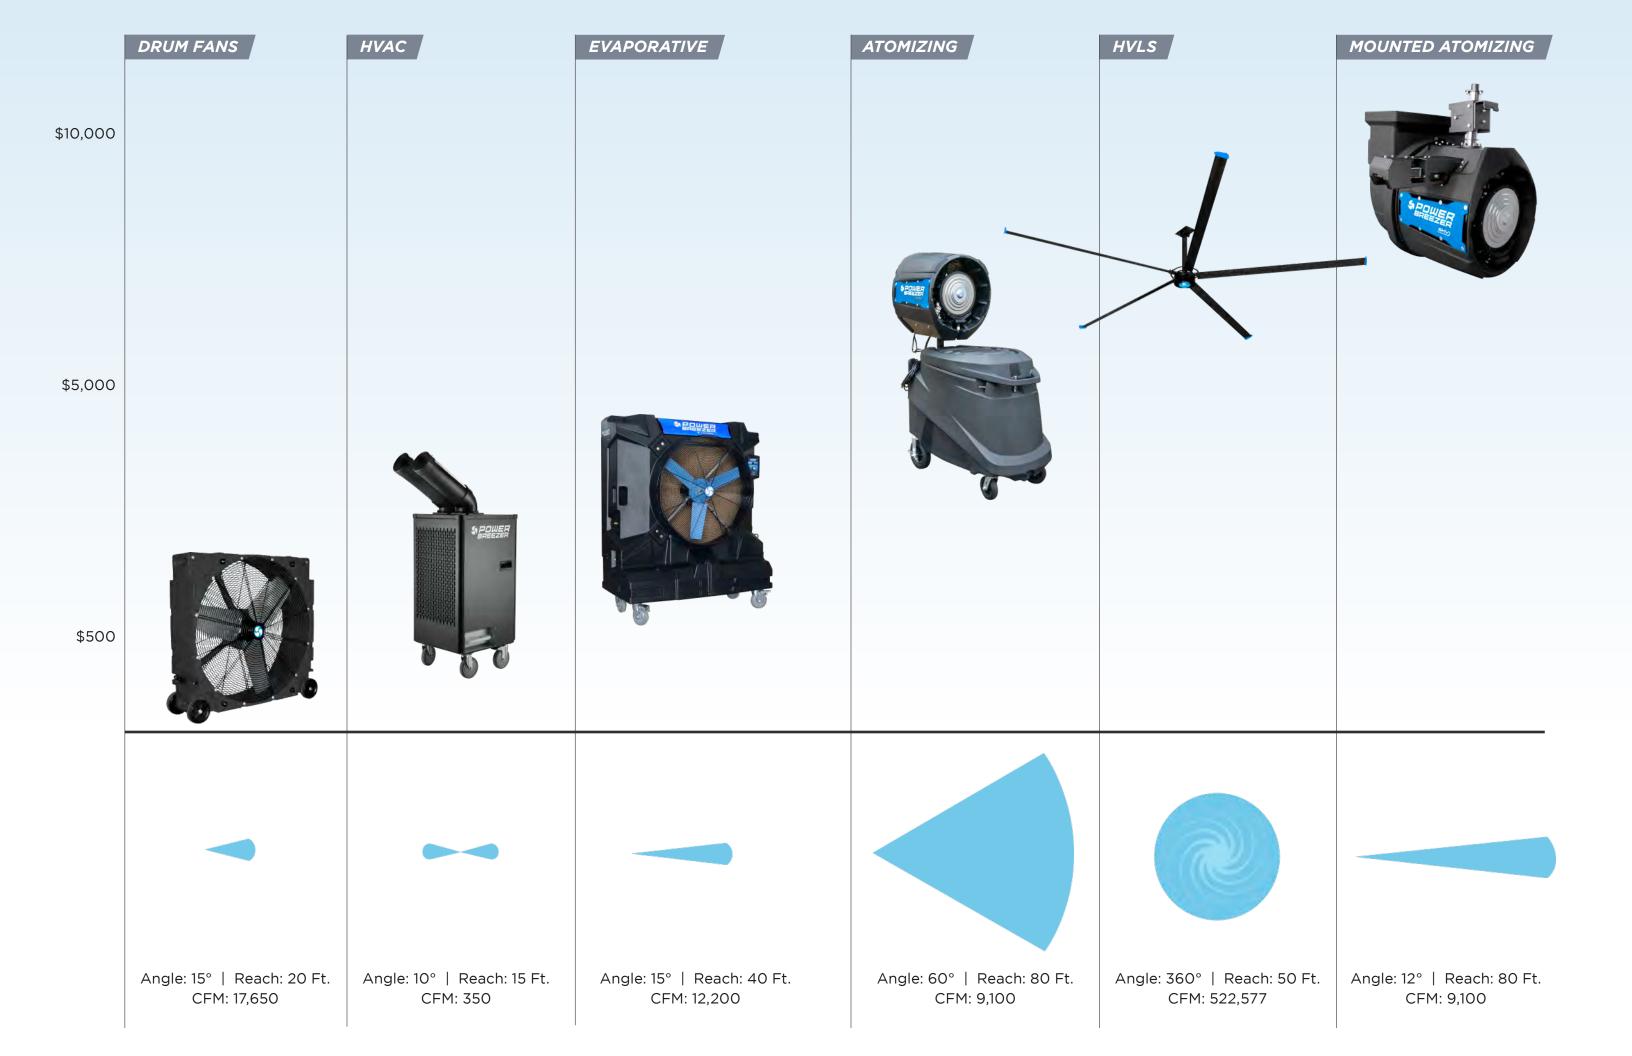


LUDICROUS COOLING: AUTONOMOUS MOUNTED SOLUTIONS

POWER BREEZER SKY - THE ULTIMATE TRAILER AND FACILITY COOLING SYSTEM



INTELLIGENT - Set and forget. Remotely program all operational parameters and track labor productivity.

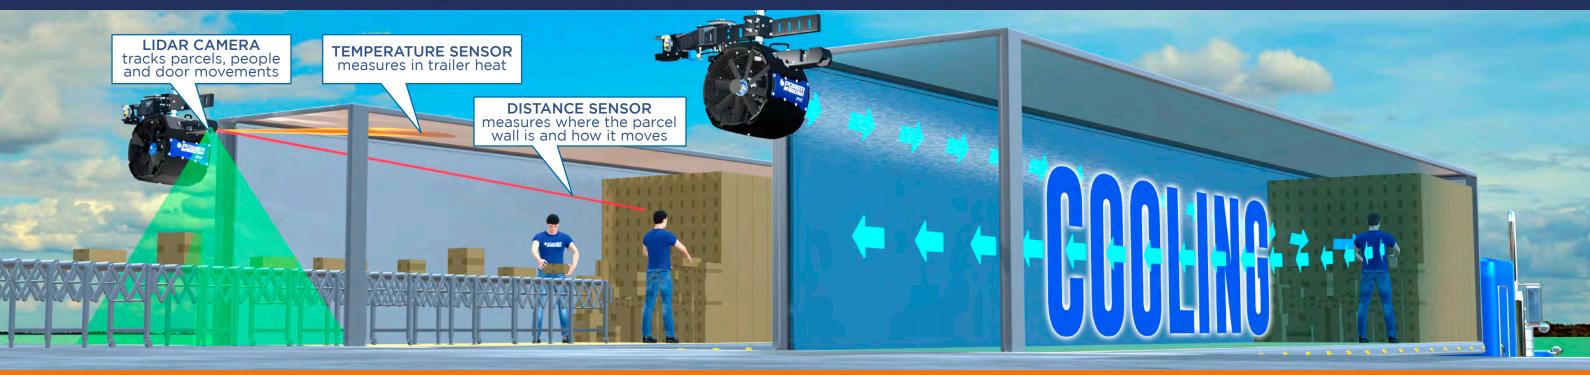


ORDER YOUR POWER BREEZER SKY DEMO TODAY!





UNIQUE AREA COOLING & AIR MOVEMENT SOLUTIONS

POWER BREEZER C CLASS – HVLS ceiling fans engineered for safety and longevity.

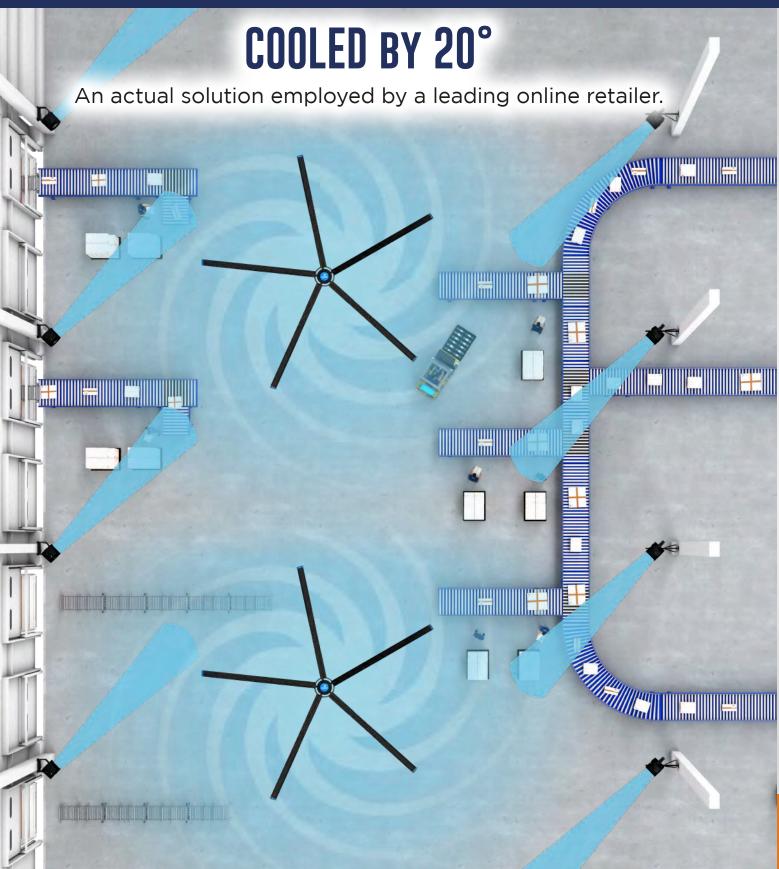



15% LIGHTER

STANDARD



PATENTED AIRFOIL FOR HIGHEST EFFICIENCY AIRFLOW







Choose Targeted HVLS Cooling from Power Breezer!

THE LOWEST COST PERSONAL COOLING SOLUTIONS

POWER BREEZER H CLASS – Personal cooling for workers in stationary job roles.

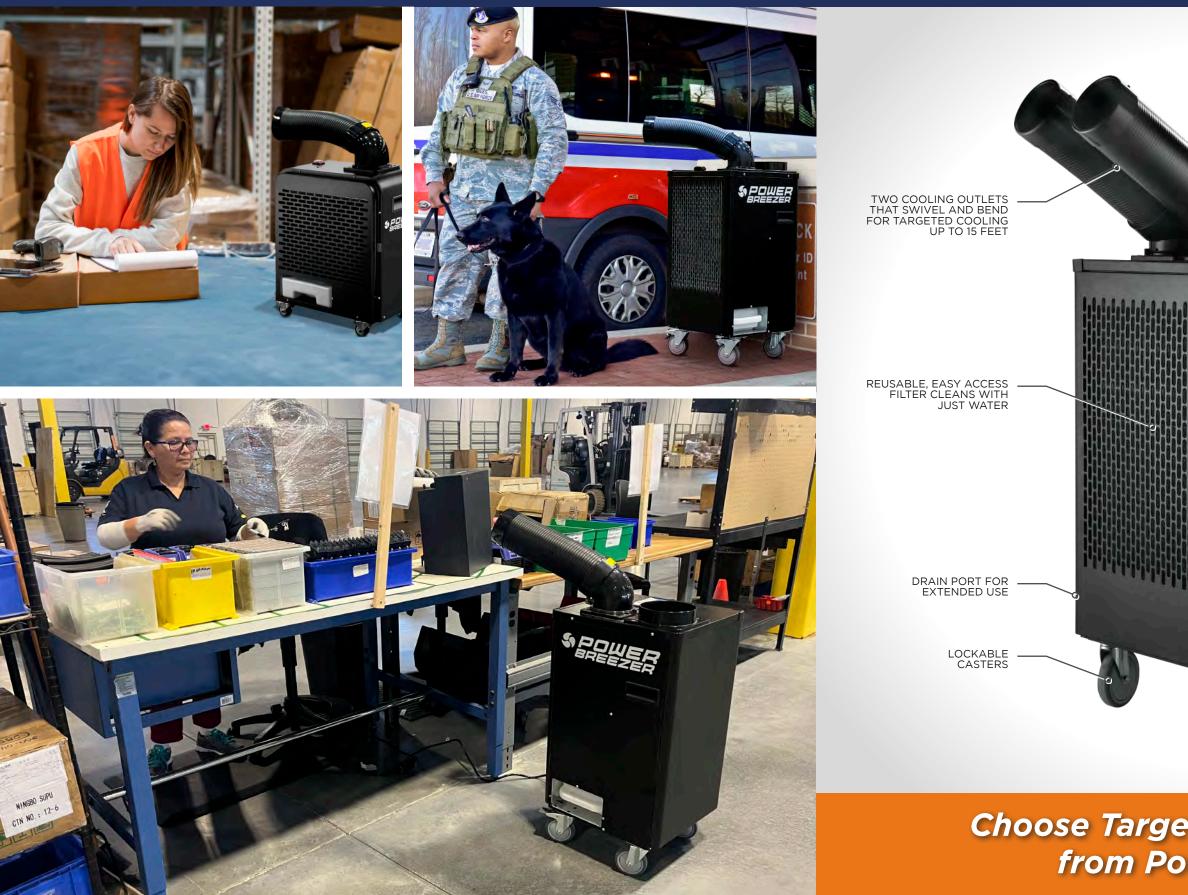



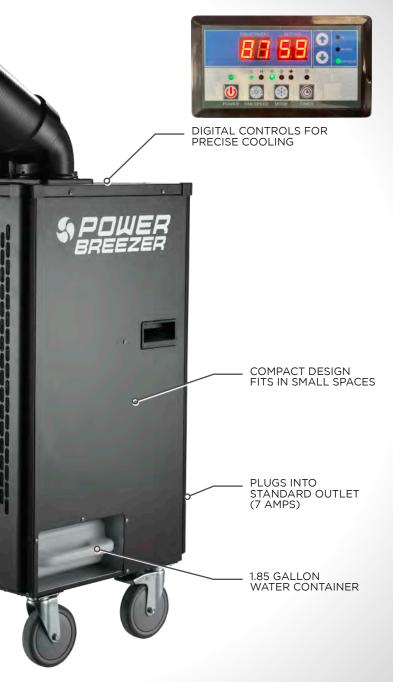

Choose Targeted HVAC Cooling from Power Breezer!

THE PINNACLE OF MOBILE ATOMIZED COOLING

POWER BREEZER M CLASS - The longest range and highest BTU portable cooling solution.



Choose Targeted Atomizing Cooling from Power Breezer!









REDEFINED EVAPORATIVE COOLING

POWER BREEZER E CLASS - The longest range and highest BTU portable cooling solution.



SPOWER BREEZER

MOUNTED ATOMIZING COOLERS

The Power Breezer S Class truly cools where no other solution can. These mounted units provide focused, powerful, intelligent cooling in hard to reach areas such as trailers, pick lines and shipping docks.

- Intelligent technology provides controlled, adaptable cooling with no user input necessary
- Atomized water cools a large area without getting people or equipment wet
- Multiple mounting options offer targeted zero footprint cooling







Model	PBS2-65B	PBS2-126P	PBS2-126S
Warranty	<u>3 Year Limited</u>	<u>3 Year Limited</u>	<u>3 Year Limited</u>
Cooling Capacity	Up to 65,000 Btu/h	Up to 126,500 Btu/h	Up to 126,500 Btu/h
Wind Range	Up to 65 feet	Up to 100 feet	Up to 100 feet
Air Volume (CFM)	7,800	9,100	9,100
Power Source	110V or 277V (Hardwired)	110V or 277V (Hardwired)	110V or 277V (Hardwired)
Water Consumption	Up to 8 Gallons/Hour	Up to 15 Gallons/Hour	Up to 15 Gallons/Hour
Mounting Types	Single Arm (Right or Left), Ho	orseshoe, Street Light	
Airflow & Cooling Controls	Manual	Manual	Autonomous or Manual
Optimization Sensors	None	Ambient Temperature, Humidity	Ambient Temperature, Humidity, Lidar, Infared Temperature, Distance
Sound Dampener	Optional	Yes	Yes
LED Light	Optional	Optional	Yes
Weight* (Lbs.)	144.8	172.3	187.5

*Weight calculation: The cooling unit weight does not include the control panel, mount, hardware, etc.



Power Breezer C Class units provide ceiling mounted, high volume cooling for your high traffic work areas. Keep air flowing and productivity high with this zero footprint, ceiling mounted powerhouse.

- PMSM (Permanent Magnet Synchronous Motor) drive motor for slimmer design, reduced weight and double-bearing transmission is completely sealed, making the motor truly maintenance-free
- 5 contoured aluminum airfoils



C160S	C180M	C200L	C240SL
<u> 3 Year Limited</u>	<u>3 Year Limited</u>	<u>3 Year Limited</u>	<u>3 Year Limited</u>
16	18	20	24
1.0kW	1.0kW	1.1kW	1.5kW
4.0Amps/200V	4.2Amps/220V	4.4Amps/220V	4.9Amps/220V
406,119	431,039	455,960	522,577
75	65	60	56
253.5	264.6	284.4	297.6
	3 Year Limited 16 1.0kW 4.0Amps/200V 406,119 75	3 Year Limited 3 Year Limited 16 18 1.0kW 1.0kW 4.0Amps/200V 4.2Amps/220V 406,119 431,039 75 65	3 Year Limited 3 Year Limited 3 Year Limited 16 18 20 1.0kW 1.0kW 1.1kW 4.0Amps/200V 4.2Amps/220V 4.4Amps/220V 406,119 431,039 455,960 75 65 60

*CFM values of HVLS fans are influenced by various factors such as ceiling height, room shape, obstructions, and other environmental conditions. **Weight calculation: The main body weight does not include the control box, extension rods, top connecting parts, etc.

- Digital wall controller with status interface
- Durable construction for long-lasting performance
- Low noise operation



If your environment includes workers in high tech positions that need personalized cooling, look no further than the Power Breezer H Class. The H Class is a line of portable, personal air conditioning systems that provide powerful, dry cooling for 1-3 individuals.

- Uses environmentally friendly R32 refrigerant
- No need to install: plug and play, portable and safe
- Safety features: overheating temperature and overload power-off protection
- Adjustable swing and bending design of the air duct, no dead angle exhaust
- Control panel design prevents dust from entering
- Large capacity condensate tank



The Power Breezer M Class is the pinnacle of mobile cooling solutions. Built rugged, these atomizing cooling machines oscillate up to 60 degrees providing a massive cone of cooling for your high concentration work zones.

- Durable portable design can be used in hard to cool indoor and outdoor areas.
- No filters, nozzles or hose connections results in cleaner air, lower costs, and minimal maintenance.







Model	H530M	H750L	H950SL
Warranty	<u>3 Year Limited</u>	<u>3 Year Limited</u>	3 Year Limited
Power	110-120V/60Hz	110-120V/60Hz	110-120V/60Hz
Air Volume (CFM)	135	235	350
EER	6.36	8.43	11.36
Cooling (Btu/h)	7,000	9,000	13,600
Measurements (In.)	18.5x11.5x24.3	16.0x16.9x33.9	16.9x19.4x37.9
Weight (Lbs.)	57.2	82.5	107.8
Condensate Tank (Gal.)	.79	1.32	1.85



Model	PB4BASE	PB4MAX	PB4TITAN
Warranty	<u>3 Year Limited</u>	<u>3 Year Limited</u>	<u>3 Year Limited</u>
Cooling Capacity	30,800 Btu/h	65,600 Btu/h	126,500 Btu/h
Wind Range	Up to 65 feet	Up to 100 feet	Up to 100 feet
Air Volume (CFM)	7,800	9,100	9,100
Power Source / Plug Type	110 V / B (U.S. Standard)	110 V / B (U.S. Standard)	110-220 V Universal / B (U.S. Standard), G or I
Water Consumption	Up to 4 Gallons/Hour	Up to 8 Gallons/Hour	Up to 15 Gallons/Hour
Tank Capacity (Gal.)	85	85	85
Oscillation	Yes	Yes	Yes
Measurements (In.)	Stored: H: 46.92" W: 29.64" Mounted: H: 73.52" W: 29.64"	D: 45.38" D: 53.96"	
Weight* (Lbs.)	240	240	240
NSN	4120-01-612-8300		4140-01-624-3989

- Easy 2-minute set-up just add water and turn on.
- Atomized water cools a large area without getting people or equipment wet.







Evaporative cooling provides high efficiency cooling in areas where things need to stay cool and dry. The Power Breezer E Class offers mobile long, running performance for your high concentration, machine driven work zones.

- Attractive compact design
- Wheeled units with integrated water tank for multiple applications
- Long uninterrupted running time before water refills

- Centrifugal fan
- Automatic water supply
- Eco-friendly: no compressor, no gas, very low consumption
- 8.2 foot grounded power cord




If portable, powerful air movers are what you are looking for then the Power Breezer F Class fans are the way to go. The F Class are rugged high powered mobile fans that will bring cooling to any work zone in your facility.

- Roto molded construction for durability
- Powerful aluminum fan blades
- Stackable design for easy shipping and storage







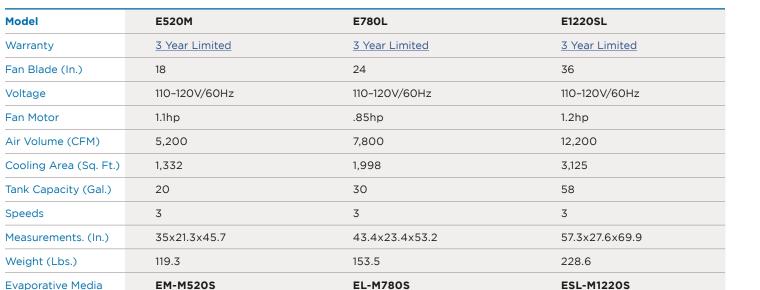



		11110	
_		\$110	
	1.28		
	1.2.3	79056	
	1000	(17996)	
	00002		
10.00			
10.00	ғаны.	1100	
	107HZ		
	nnnut	WHEEL BO	
		L. TRN	u.
	- DEFE	91503	28
1	(E) HH	10000	777
1.0			96
100	1000		82
	- 386	1000	es,
100	- 105	2026	8
		22.53	11
200		(000r	з
-			15
 a 1			

Model	F240S	F300M	F360L	F420SL
Warranty	<u>3 Year Limited</u>	<u>3 Year Limited</u>	<u>3 Year Limited</u>	3 Year Limited
Fan Blade (In.)	24	30	36	42
Voltage	110-120V/60Hz	110-120V/60Hz	110-120V/60Hz	110-120V/60Hz
Fan Motor	1/3hp	1/2hp	1/2hp	3/4hp
Air Volume (CFM)	8,850	12,350	14,150	17,650
Fan Speed (RPM)	1,100	1,100	730	720
Speeds	3	3	3	3
Measurements (In.)	27.4x10x28.5	32.7x10x33.7	38.6x12.2x39.8	43.3x14.6x44.9
Weight (Lbs.)	33.0	45.2	58.4	89.3

- Design allows multiple units to be joined
- 15 foot grounded power cord
- Four rubber wheels, for convenient transportation and positioning







ACCESSORIES

SOUND DAMPENER

Our unique sound dampener attaches to the back of the Power Breezer Mach 4 as well as the Power Breezer Sky's fan head.

- Easily attaches on both the mobile and fixed units manufactured in 2020+
- Reduces sound by up to 16dB





MODELS BEGINNING WITH THE SERIAL NUMBERS	MODEL NAME	PART NUMBER
PB-6004 and PB-6006	PB4BASE, PB4MAX, PB4TITAN	150-000-060-A
SK	S2-65B, S2-126P, S2-126S	150-000-050-A

HAIR GUARD

Add additional protection to your Power Breezer.

- Prevents hair and other foreign objects from entering the fan head components
- Durable, waterproof material provides years of reliable protection
- Attaches with included zip ties and can be easily installed in minutes

MODELS	NUMBER
POWER BREEZER	PART





MODELS BEGINNING WITH THE SERIAL NUMBERS	MODEL NAME	PAF NU
PB-6004 and PB-6006	PB4BASE, PB4MAX, PB4TITAN	60 14
52F0 and PB-6003	MARK 2, MARK 3	60
		*Porr



FLEXIBLE DUCTING KIT

- Our unique one-piece ducting kit attaches onto the Power Breezer's head.
- Adaptable solution for a wide range of cooling needs
- Cools for a fraction of the cost of HVAC
- Portable with minimal footprint

Color	Black
Extended Size	12 ft length. 29 in. dia. (73.7 cm) at fan end 20 in. dia. (50.8 cm) at duct end
Weight	11.6 lbs. (5.26 kg)
Fabric Weight	13oz.yd ² (441g/m ²)
Temperature Rating	-20° to 180° F (-29° to 82° C)



00-070 0-600-096-A*

00-039-A

*Berry Compliant



COLLAPSES FOR STORAGE





HEAD SLEEVES

- Make your Power Breezer a revenue generator with ad space
- Increase brand recognition
- Attract customers and attention
- Made with long-lasting, wrinkle and fade resistant stretch nylon for repeated use
- Easily installs and removes in seconds



MODELS BEGINNING WITH THE SERIAL NUMBERS	MODEL NAME	PART NUMBER
PB-6004 and PB-6006	PB4BASE, PB4MAX, PB4TITAN	600-065-A
52F0 and PB-6003	Mark 2, Mark 3	600-014-A
5278	02	500-081-A

ATOMIZER GUARD

Add additional protection to your Power Breezer.

- Proprietary protective design prevents touching of atomizer disk
- Durable, waterproof material provides years of reliable protection
- Attaches easily with included fasteners (4) and spacers (4)

MODELS BEGINNING WITH THE SERIAL NUMBER	MODEL NAME	PART NUMBER
PB-6006	PB4BASE, PB4MAX, PB4TITAN	180-900-670

POPULAR PARTS

HVLS CEILING F	ANS	
DESCRIPTION	PART NUMBER	MODELS
Fan Motor	580-200-001-A	C160S, C180M.
Control Module	580-200-002-A	C180M, C200L, C240SL

ATOMIZING COOLERS

DESCRIPTION	PART NUMBER	MODELS
Water Pump Kit	150-600-081	PB4BASE,
Drain Plug	140-400-265-A	PB4MAX PB4TITAN
Front Casters	400-253-A	
Rear Wheels	400-002	
Atomizer Assy.	140-900-600-A	
Atomizer Motor	140-200-206	
Rotation Assy.	140-700-300-В	
CS Rotation Motor	200-158-В	
Control Panel	140-600-031	
Power Cord	202-055-C	
Fan Motor	150-200-213-A	
Head Handles	140-600-084-В	

EVAPORATIVE COOLERS

DESCRIPTION	PART NUMBER	MODELS
Control Pad (same for all models)	520-200-021-A	E520M, E780L, E1220SL
Water Pump	520-200-018-A 520-200-019-A 520-200-020-A	E520M, E780L, E1220SL
Evaporative Media	EM-M520S EL-M780S ESL-M1220S	E520M, E780L, E1220SL
Fan Motor	520-200-015-A 520-200-016-A 520-200-017-A	E520M, E780L, E1220SL

ORDER YOUR PARTS TODAY

844.233.5673


DESCRIPTION	PART NUMBER	MODELS
Enclosure	560-300-008-A 560-300-023-A 560-300-037-A	H530M H750L H950SL
Indoor Temp. Sensor	560-200-014-A 560-200-029-A	H750L H950SL
Evap. Temp. Sensor	560-200-015-A 560-200-030-A	H750L H950SL
Outlet Temp. Sensor	560-200-016-A 560-200-031-A	H75OL H95OSL
DRUM FANS		
DESCRIPTION	PART NUMBER	MODELS
Fan Motor	540-200-007-A 540-200-008-A 540-200-009-A 540-200-010-A	F240S, F300M, F360L, F420SL
Power Cord (same for all models)	540-200-011-A	F240S, F300M, F360L, F420SL
Switch (same for all models)	540-200-012-A	F240S, F300M, F360L, F420SL
Switch Knob (same for all models)	540-100-005-A	F240S, F300M, F360L, F420SL
Wheels (4) (same for all models)	540-300-022-A	F240S, F300M, F360L, F420SL

UNIVERSAL EVAPORATIVE MEDIA		
DESCRIPTION	PART NUMBER	
60"H x 12"W x 6"D	JTS-M270S	
48"H x 12"W x 6"D	JTS-M260S	
36"H x 12"W x 6"D	JTS-M250S	
24"H x 11"W x 4"D	JTS-M230S	
19"H x 11"W x 4"D	JTS-M220S	

www.powerbreezer.com/product-category/parts/ customerservice@powerbreezer.com

AT 95°F YOUR LABOR COSTS DOUBLE





\$1,000 per employee/month 66 work hours/month

When it is 90°F the cost of quality doubles to 4% of revenue


per employee/month 75 work hours/month

When it is 95°F

there is a 45% productivity loss.



Resource Productivity vs. Heat



Injury Cost Baseline and Heat Injury Cost



Summer Turnover Compared to Office Workers





6031 Airport Drive, Suite 100 Charlotte, NC 28208 per employee/month 6 work hours/month

When it is hot, people are injured twice as often.







Replacing employees costs 15–25% of the their annual pay, when it is hot attrition doubles.



FOR MORE INFORMATION PLEASE CONTACT US:

PowerBreezer.com | sales@powerbreezer.com U.S. 844.233.5673 | Int'l. 001 954 418 4530