


YOU HAVE A HEAT PROBLEM, AND YOU HAVE OPTIONS.



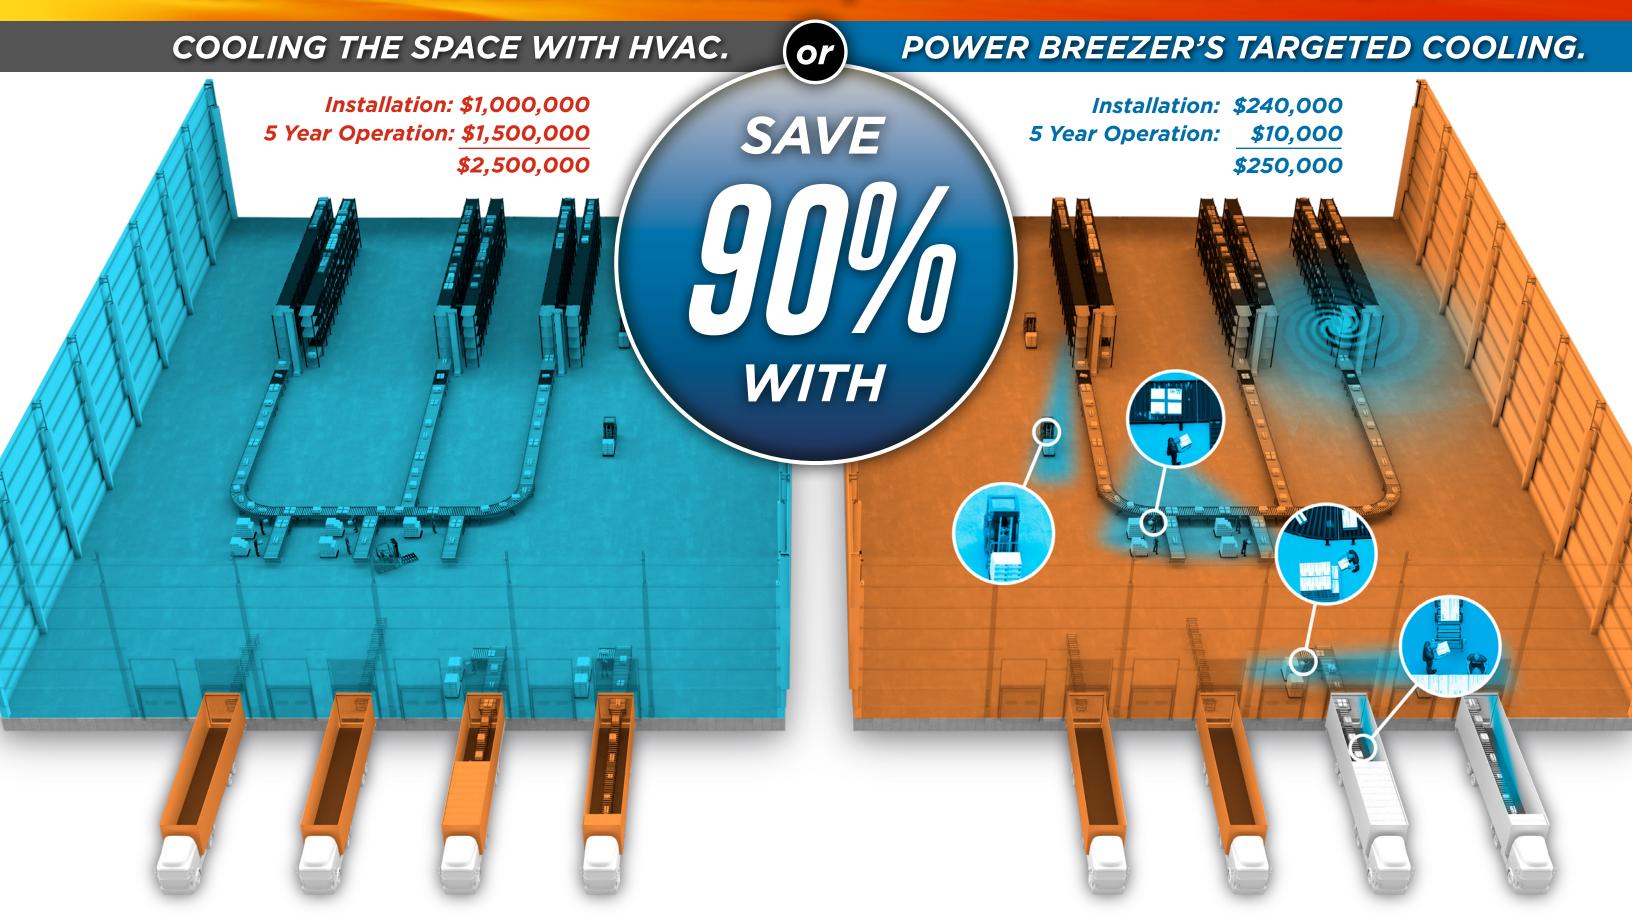


Our commitment to you is simple but unwavering:

We promise to provide a world-class customer experience every time you interact with our team. We guarantee that we will strive to continuously improve our already industry leading customer service, ensuring your Power Breezer units deliver cooling where and when you need it.

VP, Customer Service

Get the information you need, when you need it

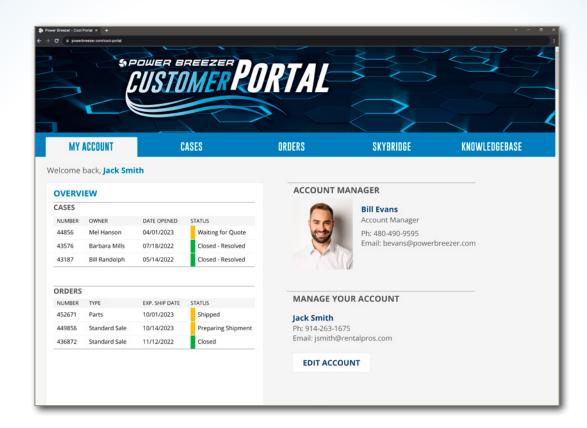

Account snapshot:

- Contact
- Products
- Pricing

Customer service:

- Requests
- History
- Spend

Purchase portal:

- Open orders
- Order history
- New orders

Transparent key Customer Service metrics







35 56

% of Parts Available

Backordered Parts and Lead TimesDESCRIPTIONLEAD TIME / DAYSAtomizer Driver Board20Saddle Assembly18Rotation Pipe Assembly15Water Valve Tubing Kit12Impeller Assembly10Drain Plug7

Always ready, always on, customized service programs:

SILVER CARE:

- Free Consumables
- Parts Discounts

GOLD CARE:

- Cleaning and Diagnostics
- Free Consumables
- Parts Discounts

PLATINUM CARE:

- Free Parts and Labor
- Cleaning and Diagnostics
- Free Consumables



at the time of purchase with a 3 year Gold or Platinum program.

Contact us for more information

customerservice@powerbreezer.com 844.233.5673

*Subject to service area limitations.




Power Breezer is committed to a program of constant improvement fueled by interaction with our valued customers that drives change in every aspect of our organization. This results in creating the best possible cooling experience for our customers.

VP, Customer Experience



Does this pattern of customer service look familiar?

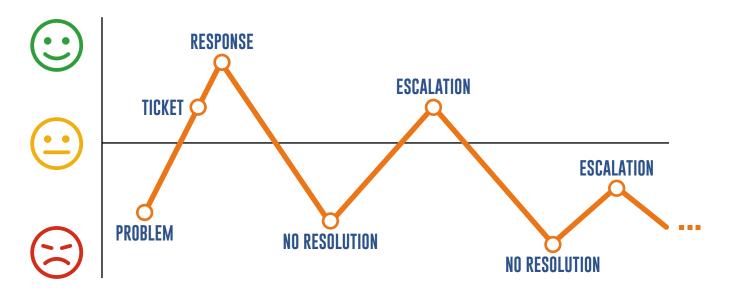


With Power Breezer only you choose who you talk to.




Power Breezer	Industry Standard
Dedicated Customer Experience VP	?
You choose how to escalate	?
100% of new installations surveyed	?
100% dissatisfied customers interviewed	?
Quarterly customer surveys	?
Customer centric portal	?
Spare parts inventory visibility	?
Dedicated root cause team	?
Transparent performance metrics	?
Remote monitoring	?



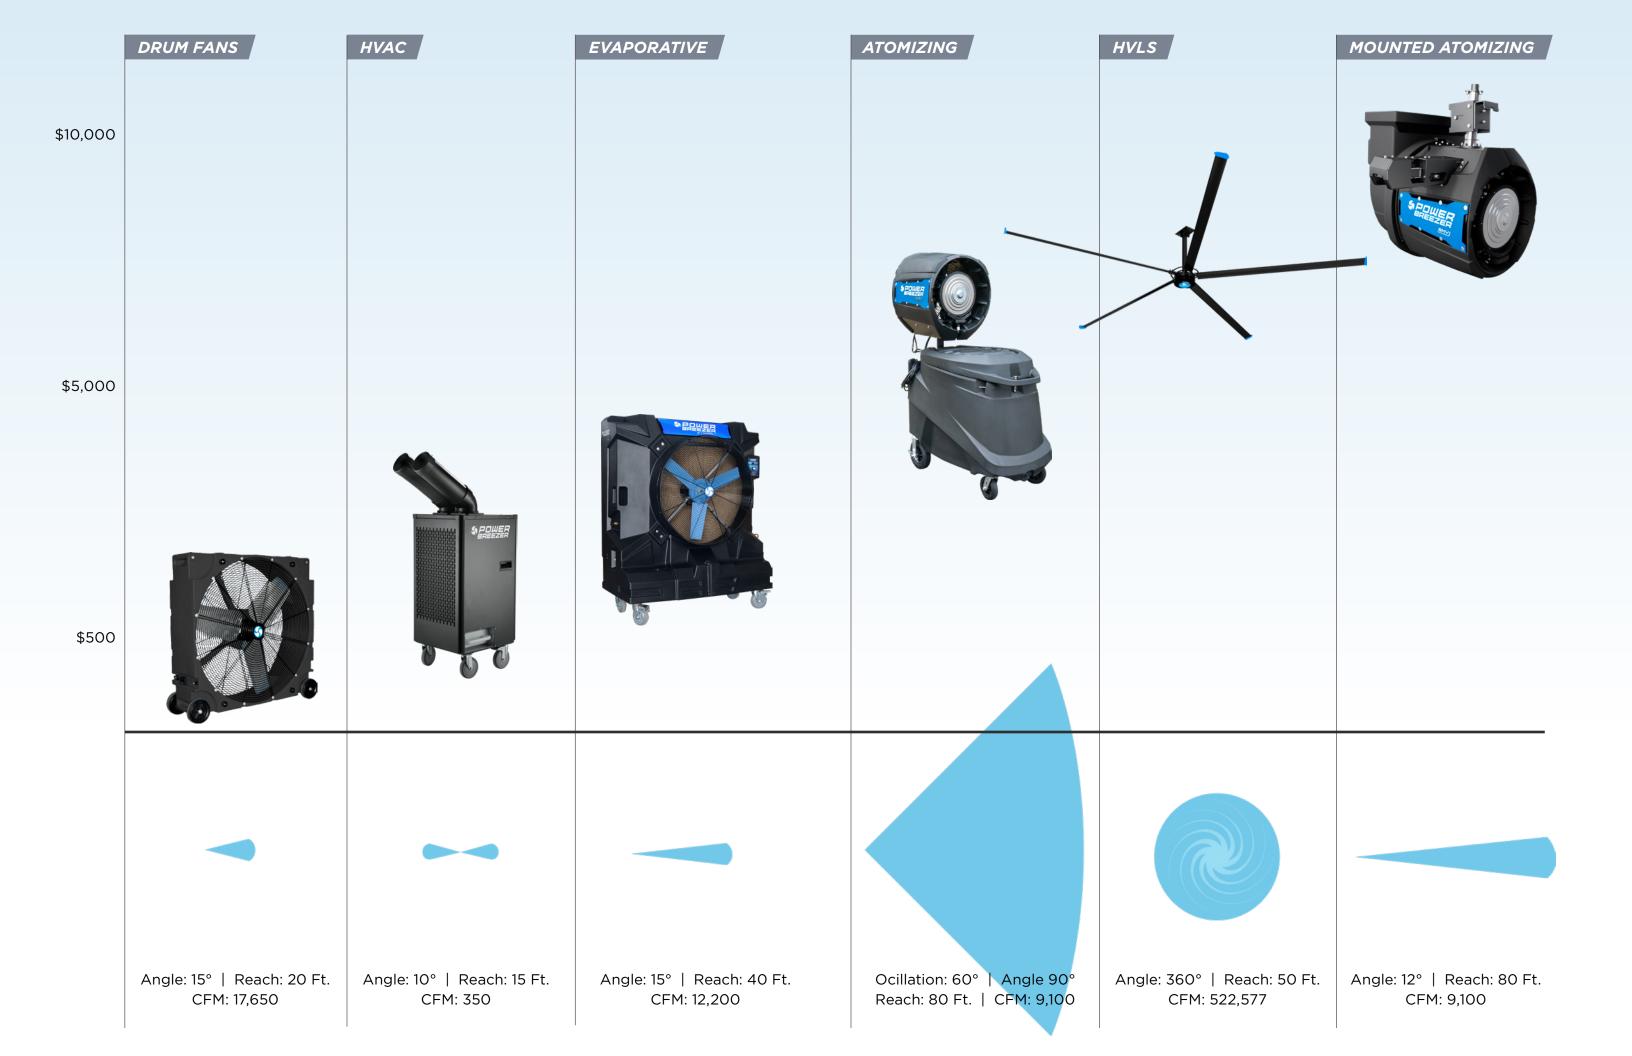


LUDICROUS COOLING: AUTONOMOUS MOUNTED SOLUTIONS

POWER BREEZER SKY - THE ULTIMATE TRAILER AND FACILITY COOLING SYSTEM

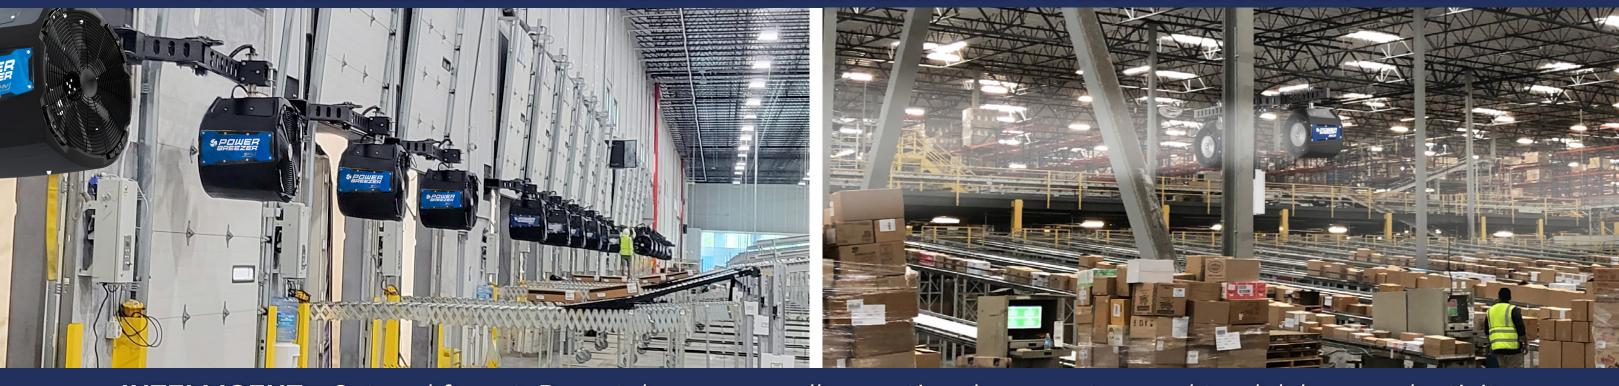


INTELLIGENT - Set and forget. Remotely program all operational parameters and track labor productivity.

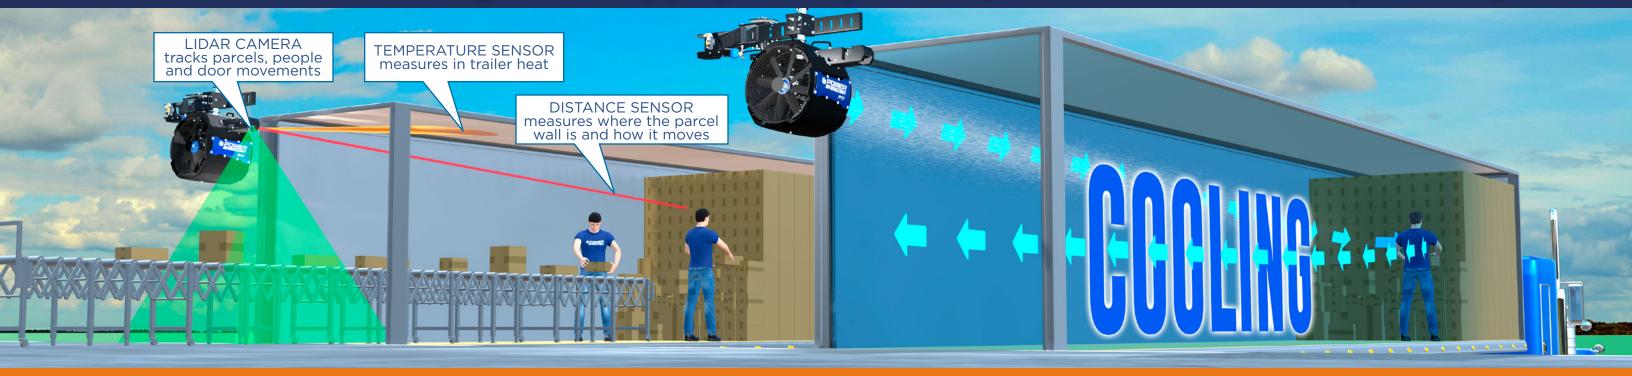

ORDER YOUR POWER BREEZER SKY DEMO TODAY!

UNIQUE AREA COOLING & AIR MOVEMENT SOLUTIONS

POWER BREEZER C CLASS - HVLS ceiling fans engineered for safety and longevity.

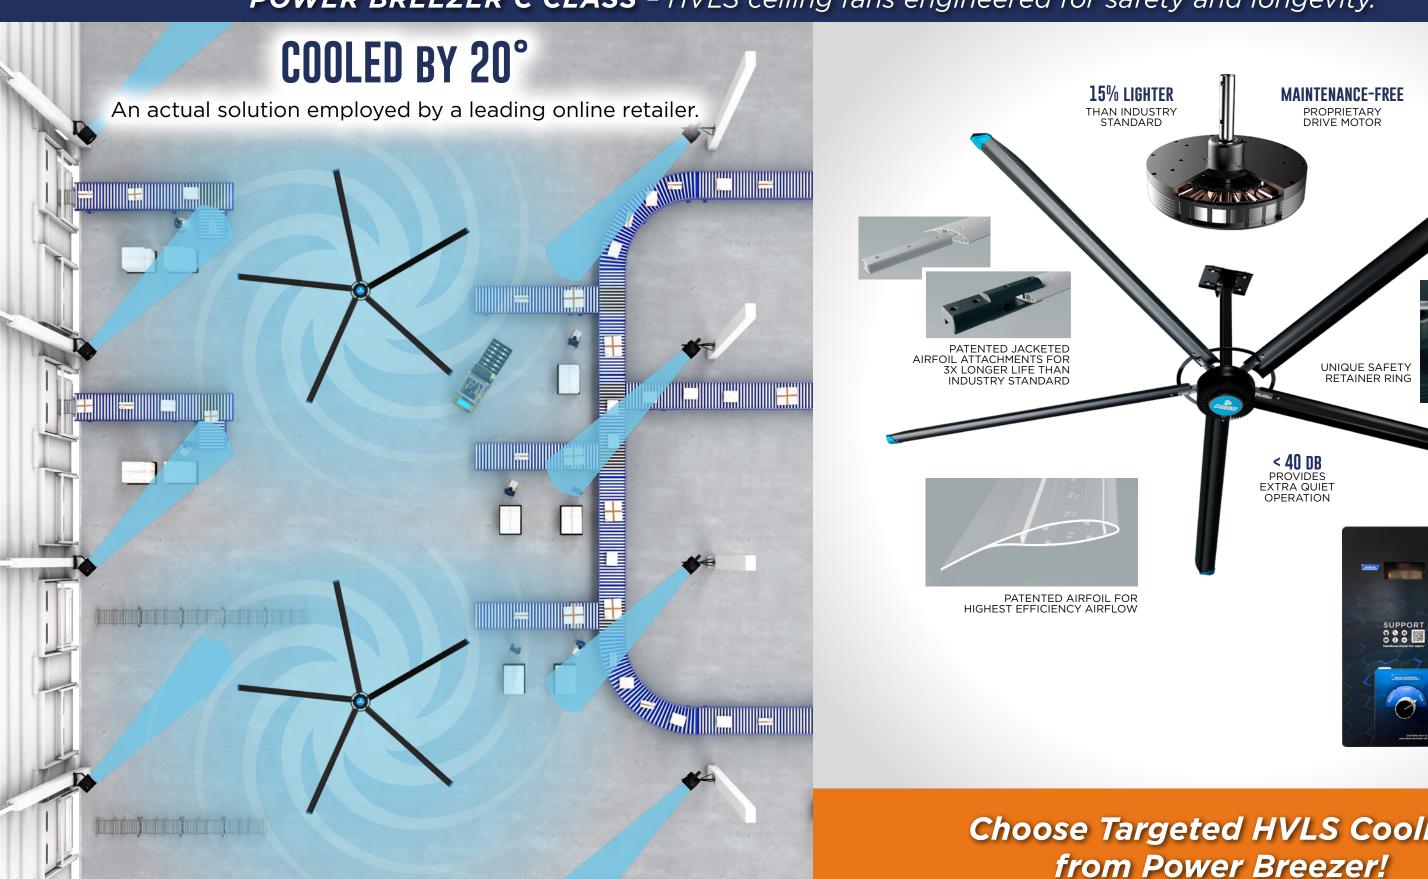



Choose Targeted HVLS Cooling

THE LOWEST COST PERSONAL COOLING SOLUTIONS

POWER BREEZER H CLASS - Personal cooling for workers in stationary job roles.









Choose Targeted HVAC Cooling from Power Breezer!

THE PINNACLE OF MOBILE ATOMIZED COOLING

POWER BREEZER M CLASS - The longest range and highest BTU portable cooling solution.



Choose Targeted Atomizing Cooling from Power Breezer!







REDEFINED EVAPORATIVE COOLING

POWER BREEZER E CLASS - The longest range and highest BTU portable cooling solution.









Choose Targeted Evaporative Cooling from Power Breezer!



The Power Breezer S Class truly cools where no other solution can. These mounted units provide focused, powerful, intelligent cooling in hard to reach areas such as trailers, pick lines and shipping docks.

- Intelligent technology provides controlled, adaptable cooling with no user input necessary
- Multiple mounting options offer targeted zero footprint cooling
- Atomized water cools a large area without getting people or equipment wet







Model	PBS2-65B	PBS2-126P	PBS2-126S
Warranty	3 Year Limited	3 Year Limited	3 Year Limited
Cooling Capacity	Up to 65,000 Btu/h	Up to 126,500 Btu/h	Up to 126,500 Btu/h
Wind Range	Up to 65 feet	Up to 100 feet	Up to 100 feet
Air Volume (CFM)	7,800	9,100	9,100
Power Source	110V or 277V (Hardwired)	110V or 277V (Hardwired)	110V or 277V (Hardwired)
Water Consumption	Up to 8 Gallons/Hour	Up to 15 Gallons/Hour	Up to 15 Gallons/Hour
Mounting Types	Single Arm (Right or Left), Ho	orseshoe, Street Light	
Airflow & Cooling Controls	Manual	Manual	Autonomous or Manual
Optimization Sensors	None	Ambient Temperature, Humidity	Ambient Temperature, Humidity, Lidar, Infared Temperature, Distance
Sound Dampener	Optional	Yes	Yes
LED Light	Optional	Optional	Yes
Weight* (Lbs.)	144.8	172.3	187.5

^{*}Weight calculation: The cooling unit weight does not include the control panel, mount, hardware, etc.



Power Breezer C Class units provide ceiling mounted, high volume cooling for your high traffic work areas. Keep air flowing and productivity high with this zero footprint, ceiling mounted powerhouse.

- PMSM (Permanent Magnet Synchronous Motor)
 drive motor for slimmer design, reduced weight and
 double-bearing transmission is completely sealed,
 making the motor truly maintenance-free
- 5 contoured aluminum airfoils

- Digital wall controller with status interface
- Durable construction for long-lasting performance
- Low noise operation





Model	C160S	C180M	C200L	C240SL
Warranty	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited
Diameter (Ft.)	16	18	20	24
Input Power	1.0kW	1.0kW	1.1kW	1.5kW
Full Load Current	4.0Amps/200V	4.2Amps/220V	4.4Amps/220V	4.9Amps/220V
Air Volume (CFM)*	406,119	431,039	455,960	522,577
Max Fan Speed (RPM)	75	65	60	56
Body Weight (Lbs.)**	253.5	264.6	284.4	297.6

^{*}CFM values of HVLS fans are influenced by various factors such as ceiling height, room shape, obstructions, and other environmental conditions.

^{**}Weight calculation: The main body weight does not include the control box, extension rods, top connecting parts, etc.



If your environment includes workers in high tech positions that need personalized cooling, look no further than the Power Breezer H Class. The H Class is a line of portable, personal air conditioning systems that provide powerful, dry cooling for 1-3 individuals.

- Uses environmentally friendly R32 refrigerant
- No need to install: plug and play, portable and safe
- Safety features: overheating temperature and overload power-off protection
- Adjustable swing and bending design of the air duct, no dead angle exhaust
- Control panel design prevents dust from entering
- Large capacity condensate tank







Model	H530M	H750L	H950SL
Warranty	3 Year Limited	3 Year Limited	3 Year Limited
Power	110-120V/60Hz	110-120V/60Hz	110-120V/60Hz
Air Volume (CFM)	135	235	350
EER	6.36	8.43	11.36
Cooling (Btu/h)	7,000	9,000	13,600
Measurements (In.)	18.5x11.5x24.3	16.0x16.9x33.9	16.9x19.4x37.9
Weight (Lbs.)	57.2	82.5	107.8
Condensate Tank (Gal.)	.79	1.32	1.85



The Power Breezer M Class is the pinnacle of mobile cooling solutions. Built rugged, these atomizing cooling machines oscillate up to 60 degrees providing a massive cone of cooling for your high concentration work zones.

- Durable portable design can be used in hard to cool indoor and outdoor areas.
- No filters, nozzles or hose connections results in cleaner air, lower costs, and minimal maintenance.
- Easy 2-minute set-up just add water and turn on.
- Atomized water cools a large area without getting people or equipment wet.







Model	PB4BASE	PB4MAX	PB4TITAN
Warranty	3 Year Limited	3 Year Limited	3 Year Limited
Cooling Capacity	30,800 Btu/h	65,600 Btu/h	126,500 Btu/h
Wind Range	Up to 65 feet	Up to 100 feet	Up to 100 feet
Air Volume (CFM)	7,800	9,100	9,100
Power Source / Plug Type	110 V / B (U.S. Standard)	110 V / B (U.S. Standard)	110-220 V Universal / B (U.S. Standard), G or I
Water Consumption	Up to 4 Gallons/Hour	Up to 8 Gallons/Hour	Up to 15 Gallons/Hour
Tank Capacity (Gal.)	85	85	85
Oscillation	Yes	Yes	Yes
Measurements (In.)	Stored: H: 46.92" W: 29.64" Mounted: H: 73.52" W: 29.64"	D: 45.38" D: 53.96"	
Weight* (Lbs.)	240	240	240
NSN	4120-01-612-8300		4140-01-624-3989




Evaporative cooling provides high efficiency cooling in areas where things need to stay cool and dry. The Power Breezer E Class offers mobile long, running performance for your high concentration, machine driven work zones.

- Attractive compact design
- Wheeled units with integrated water tank for multiple applications
- Long uninterrupted running time before water refills

- Centrifugal fan
- Automatic water supply
- Eco-friendly: no compressor, no gas, very low consumption











E520M	E780L	E1220SL
3 Year Limited	3 Year Limited	3 Year Limited
18	24	36
110-120V/60Hz	110-120V/60Hz	110-120V/60Hz
1.1hp	.85hp	1.2hp
5,200	7,800	12,200
1,332	1,998	3,125
20	30	58
3	3	3
35x21.3x45.7	43.4x23.4x53.2	57.3×27.6×69.9
119.3	153.5	228.6
EM-M520S	EL-M780S	ESL-M1220S
	3 Year Limited 18 110-120V/60Hz 1.1hp 5,200 1,332 20 3 35x21.3x45.7 119.3	3 Year Limited 3 Year Limited 18 24 110-120V/60Hz 110-120V/60Hz 1.1hp .85hp 5,200 7,800 1,332 1,998 20 30 3 3 35x21.3x45.7 43.4x23.4x53.2 119.3 153.5



If portable, powerful air movers are what you are looking for then the Power Breezer F Class fans are the way to go. The F Class are rugged high powered mobile fans that will bring cooling to any work zone in your facility.

- Roto molded construction for durability
- Powerful aluminum fan blades
- Stackable design for easy shipping and storage

- Design allows multiple units to be joined
- 15 foot grounded power cord
- Four rubber wheels, for convenient transportation and positioning









Model	F240S	F300M	F360L	F420SL
Warranty	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited
Fan Blade (In.)	24	30	36	42
Voltage	110-120V/60Hz	110-120V/60Hz	110-120V/60Hz	110-120V/60Hz
Fan Motor	1/3hp	1/2hp	1/2hp	3/4hp
Air Volume (CFM)	8,850	12,350	14,150	17,650
Fan Speed (RPM)	1,100	1,100	730	720
Speeds	3	3	3	3
Measurements (In.)	27.4x10x28.5	32.7x10x33.7	38.6x12.2x39.8	43.3x14.6x44.9
Weight (Lbs.)	33.0	45.2	58.4	89.3

SOUND DAMPENER

Our unique sound dampener attaches to the back of the Power Breezer Mach 4 as well as the Power Breezer Sky's fan head.

- Easily attaches on both the mobile and fixed units manufactured in 2020+
- Reduces sound by up to 16dB





MODELS BEGINNING WITH THE SERIAL NUMBERS	MODEL NAME	PART NUMBER
PB-6004 and PB-6006	PB4BASE, PB4MAX, PB4TITAN	150-000-060-A
SK	S2-65B, S2-126P, S2-126S	150-000-050-A

HAIR GUARD

Add additional protection to your Power Breezer.

- Prevents hair and other foreign objects from entering the fan head components
- Durable, waterproof material provides years of reliable protection
- Attaches with included zip ties and can be easily installed in minutes

POWER BREEZER	PART
MODELS	NUMBER
PB4BASE, PB4MAX, PB4TITAN	600-030-A





MODELS BEGINNING WITH THE SERIAL NUMBERS	MODEL NAME	PART NUMBER
PB-6004 and PB-6006	PB4BASE, PB4MAX, PB4TITAN	600-070 140-600-096-A*
52F0 and PB-6003	MARK 2, MARK 3	600-039-A





12 ft length. 29 in. dia. (73.7 cm) at fan end 20 in. dia. (50.8 cm) at duct end

-20° to 180° F (-29° to 82° C)

Black

11.6 lbs. (5.26 kg)

13oz.yd² (441g/m²)

COLLAPSES FOR STORAGE





HEAD SLEEVES

- Make your Power Breezer a revenue generator with ad space
- Increase brand recognition
- Attract customers and attention
- Made with long-lasting, wrinkle and fade resistant stretch nylon for repeated use
- Easily installs and removes in seconds

Made in	USA

MODELS BEGINNING WITH THE SERIAL NUMBERS	MODEL NAME	PART NUMBER
PB-6004 and PB-6006	PB4BASE, PB4MAX, PB4TITAN	600-065-A
52F0 and PB-6003	Mark 2, Mark 3	600-014-A
5278	O2	500-081-A



ATOMIZER GUARD

Add additional protection to your Power Breezer.

- Proprietary protective design prevents touching of atomizer disk
- Durable, waterproof material provides years of reliable protection
- Attaches easily with included fasteners (4) and spacers (4)

MODELS BEGINNING WITH THE SERIAL NUMBER	MODEL NAME	PART NUMBER
PB-6006	PB4BASE, PB4MAX, PB4TITAN	180-900-670

POPULAR PARTS

HVLS CEILING FANS

DESCRIPTION	PART NUMBER	MODELS	
Fan Motor	580-200-001-A	C160S,	
Control Module	580-200-002-A	C180M, C200L, C240SL	

ATOMIZING COOLERS

AI OI II EII I O O O	PELNO	
DESCRIPTION	PART NUMBER	MODELS
Water Pump Kit	150-600-081	PB4BASI
Drain Plug	140-400-265-A	PB4MAX PB4TITA
Front Casters	400-253-A	
Rear Wheels	400-002	
Atomizer Assy.	140-900-600-A	
Atomizer Motor	140-200-206	
Rotation Assy.	140-700-300-В	
CS Rotation Motor	200-158-B	
Control Panel	140-600-031	
Power Cord	202-055-C	
Fan Motor	150-200-213-A	
Head Handles	140-600-084-B	

EVAPORATIVE COOLERS

DESCRIPTION	PART NUMBER	MODELS
Control Pad (same for all models)	520-200-021-A	E520M, E780L, E1220SL
Water Pump	520-200-018-A 520-200-019-A 520-200-020-A	E520M, E780L, E1220SL
Evaporative Media	EM-M520S EL-M780S ESL-M1220S	E520M, E780L, E1220SL
Fan Motor	520-200-015-A 520-200-016-A 520-200-017-A	E520M, E780L, E1220SL

111/1	00	α	FDS
- A 7 // A			

DESCRIPTION	PART NUMBER	MODELS
Enclosure	560-300-008-A 560-300-023-A 560-300-037-A	H530M H750L H950SL
Indoor Temp. Sensor	560-200-014-A 560-200-029-A	H750L H950SL
Evap. Temp. Sensor	560-200-015-A 560-200-030-A	H750L H950SL
Outlet Temp. Sensor	560-200-016-A 560-200-031-A	H750L H950SL


DRUM FANS		
DESCRIPTION	PART NUMBER	MODELS
Fan Motor	540-200-007-A 540-200-008-A 540-200-009-A 540-200-010-A	F240S, F300M, F360L, F420SL
Power Cord (same for all models)	540-200-011-A	F240S, F300M, F360L, F420SL
Switch (same for all models)	540-200-012-A	F240S, F300M, F360L, F420SL
Switch Knob (same for all models)	540-100-005-A	F240S, F300M, F360L, F420SL
Wheels (4) (same for all models)	540-300-022-A	F240S, F300M, F360L, F420SL

UNIVERSAL EVAPORATIVE MEDIA

DESCRIPTION	PART NUMBER	
60"H x 12"W x 6"D	JTS-M270S	
48"H x 12"W x 6"D	JTS-M260S	
36"H x 12"W x 6"D	JTS-M250S	
24"H x 11"W x 4"D	JTS-M230S	
19"H x 11"W x 4"D	JTS-M220S	

ORDER YOUR PARTS TODAY www.powerbreezer.com/product-category/parts/ customerservice@powerbreezer.com 844.233.5673

AT 95°F YOUR LABOR COSTS DOUBLE








When it is 90°F the cost of quality doubles to 4% of revenue

Resource Productivity vs. Heat



\$1,500
per employee/month
75 work hours/month


there is a 45% productivity loss.

work hours/month

When it is 95°F




Injury Cost Baseline and Heat Injury Cost



\$100
per employee/month
6 work hours/month

When it is hot, people are injured twice as often. Source: U.S. Dept. of Labo

Summer Turnover Compared to Office Workers



\$520

per employee/month
34 work hours/month

Replacing employees costs 15-25% of the their annual pay, when it is hot attrition doubles.





6031 Airport Drive, Suite 100 Charlotte, NC 28208 FOR MORE INFORMATION PLEASE CONTACT US:

PowerBreezer.com | sales@powerbreezer.com U.S. 844.233.5673 | Int'l. 001 954 418 4530